

04/2015

Mod: EXB/200I

Production code: P446 34730 (PTB-S 200/IE)



Diamond
catering equipment

AUTOMATIC TILTING PAN AT CONSTANT LEVEL WITH MIXER

PTBS
Model

Appliance of innovative design, combining the advantages of cooking the product with continuous stirring and discharging the food into receiving trolleys with the discharge spout always at a constant height from the ground. The mixing blades can be customized to suit the types of product to be processed.

The automation of the cooking parameters improves the final quality of the product and considerably reduces the kitchen personnel required.



TECHNICAL FEATURES

Cooking tank

- Cooking tank with bottom in AISI 316 polished stainless steel and walls in AISI 304 stainless steel

Jacket

- Jacket with bottom and walls in AISI 304 stainless steel

Lid

- Balanced lid in AISI 304 stainless steel with heat resistant handle

Tilting of the container

- Automatic tilting by electric or hydraulic actuator mechanism and automatic block in case of damage
- Down and up button.
- Electric supply: 400V - 3N - 50Hz
- Management with dedicated PLC and serial monitor

SUPPORT FRAME AND PANELS

- Stainless steel frame
- Thermal insulation assured by high density ceramic fibre 64/128
- Panels in stainless steel, fine satin finish

MIXING SYSTEM

- The pan is provided with a mixer with adjustable speed and possibility to automatic reverse. It built with radial arms or scraping blades in stainless steel and insert in ceramic teflon.
The mixer can be easily removed for cleaning or maintenance.

Heating system

Indirect Gas versions - with Jacket

- Heating by means of stainless steel high efficiency tube burners
- Ignition by means of manual piezo-electric lighter and pilot flame
- Valve-controlled safety tap with thermocouple
- Venting grid
- Set of jets for different types of gas
- Automatic system to block burners during tilting
- Jacket water level control taps max/min with the option of automatic filling
- Jacket pressure control by means of spring-loaded safety relief valve calibrated at 0,5 bar, vacuum valve and pressure gauge. Possibility to apply the automatic air venting of the jacket

Indirect Electric versions - with Jacket

- Heating by means of INCOLOY heating elements with adjustable power regulator
- Safety thermostat to prevent overheating and keeps the equipment from operating without water
- Jacket water level control taps max/min with the option of automatic filling
- Jacket pressure control by working pressure switch and spring-loaded safety relief valve calibrated at 0,45 bar, vacuum valve and pressure gauge
- Standard power supply 400V - 3N - 50Hz


Indirect Steam versions - with Jacket

- Heating by means of steam (from user's plant line) with a throttle valve allowing a gradual steam inlet
- Jacket pressure control by means of spring-loaded safety relief valve calibrated at 0,45 bar, vacuum valve and pressure gauge

PTBS	V	IE	IG
Inox adjustable legs	●	●	●
Set of jets for different types of gas	-	-	●
Smoke venting grid	-	-	●
Draining tap 2" AISI 316	*	*	*
Valve-controlled safety tap with thermocouple	-	-	●
Safety thermostat	-	●	●
Automatic tilting mechanism	●	●	●
Mixer with alternating rotation	●	●	●
Hose shower	*	*	*
Advanced system monitor in PLC and touch screen	●	●	●
Automatic jacket air venting	●	●	●

● standard
* optional

- no

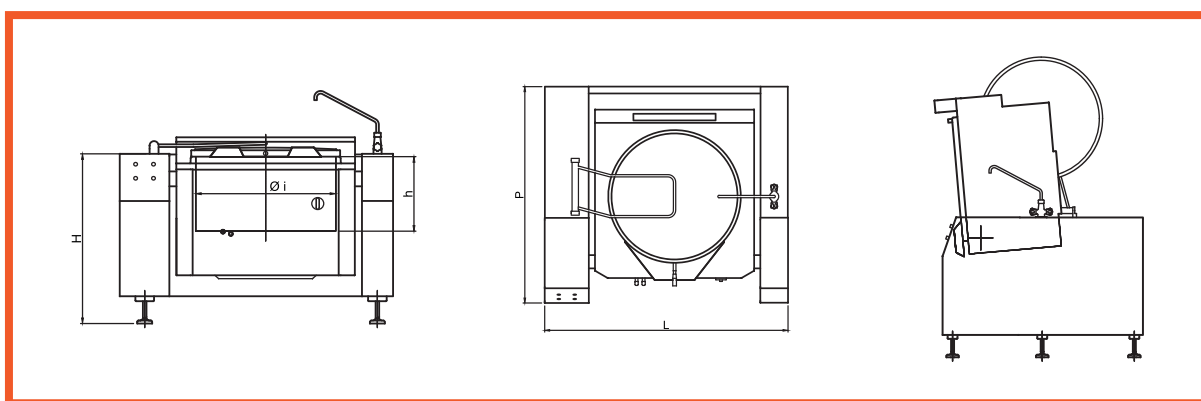

V: steam
IE: indirect el.
IG: indirect gas

MODEL	Capacity liter	Pan Dimensions L x P x H mm	Tank Dimensions Ø i x H mm	Power (kW)	
				Gas	Electric
PTB-S 200/V	200	1600x1450x1050	Ø760x500	-	0,5*
PTB-S 300/V	300	1800x1650x1150	Ø960x500	-	0,5*
PTB-S 500/V	500	1950x1850x1150	Ø1060x600	-	0,5*
PTB-S 200/IE	200	1600x1450x1050	Ø760x500	-	24,5*
PTB-S 300/IE	300	1800x1650x1150	Ø960x500	-	36,5*
PTB-S 500/IE	500	1950x1850x1150	Ø1060x600	-	48,5*
PTB-S 200/IG	200	1600x1450x1050	Ø760x500	39	0,5*
PTB-S 300/IG	300	1800x1650x1150	Ø960x500	39	0,5*
PTB-S 500/IG	500	1950x1850x1150	Ø1060x600	55	0,5*

SCHEMA DI INSTALLAZIONE INSTALLATION DIAGRAM

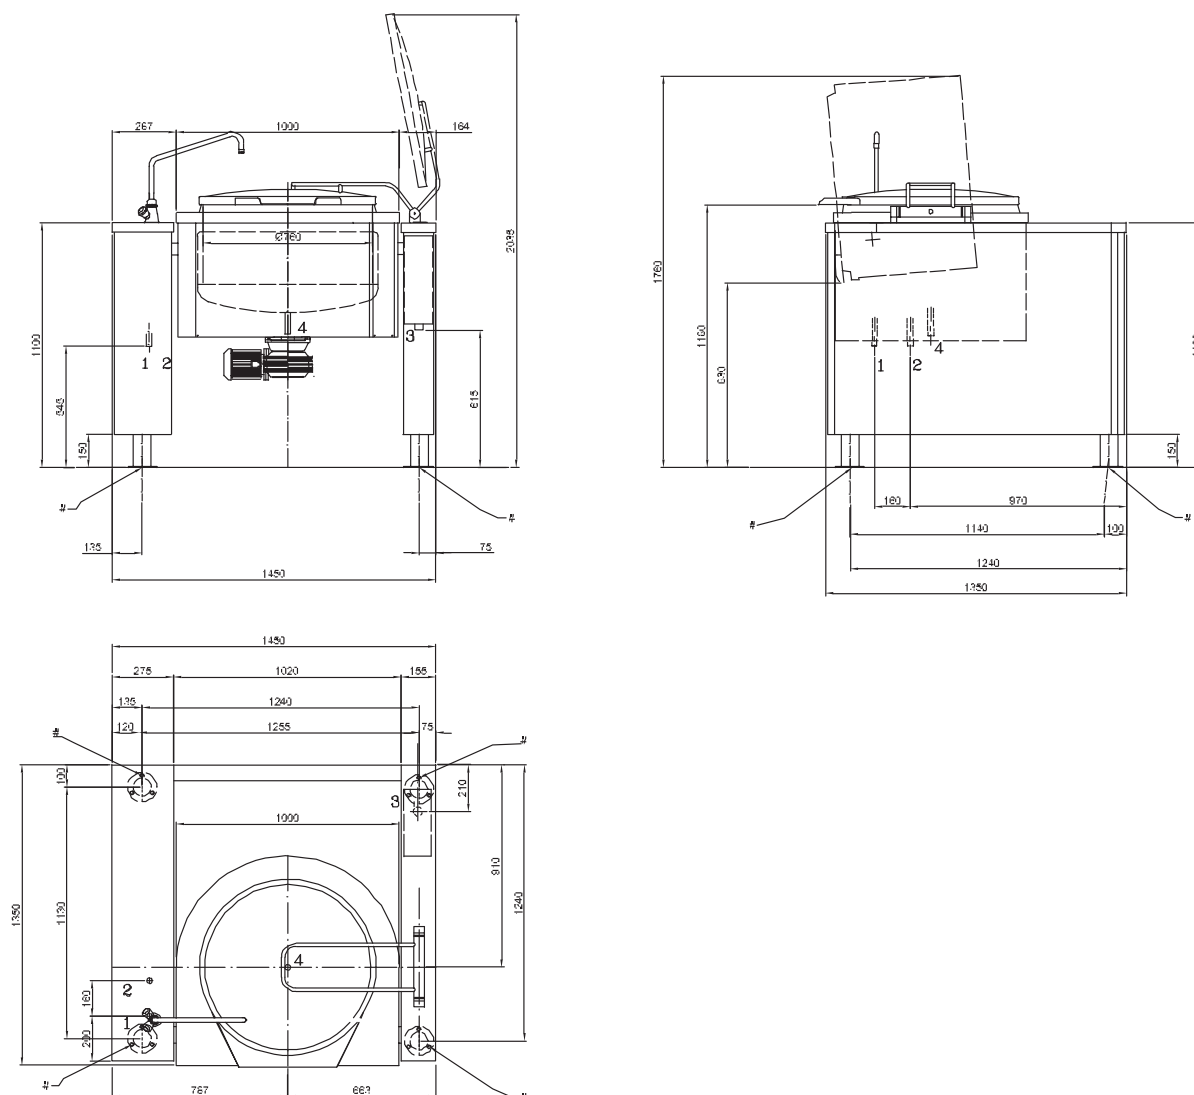


FIG. 1

IT		GB	
1 - ATTACCO ACQUA CALDA	Ø1/2" F	1 - HOT WATER CONNECTION	Ø1/2" F
2 - ATTACCO ACQUA FREDDA	Ø1/2" F	2 - COLD WATER CONNECTION	Ø1/2" F
3 - SCARICO INTERCAPEDINE	Ø1/2" F	3 - JACKET DRAINAGE	Ø1/2" F
4 - ENTRATA CAVO ELETTRICO	4G x 10 mm ²	4 - ELECTRICAL CABLE ENTRANCE	4G x 10 mm ²
# - FORO A FISSAGGIO PAVIMENTO	n. 4 VITI M.12	# - HOLE FOR IMPLANTATION ON THE FLOOR	nr. 4 M.12 SCREWS