01/2019

# Mod: E22/F23A4-S

**Production code: 393337** 



# NAME # SIS # AIA #

# Modular Cooking Range Line ECO 90 One Well Electric Fryer 23 liter



**393337 (N9KKGDBAMCA)** 

23-It electric fryer with 1 "V" shaped well (external heating elements) and 2 half size baskets

# **Short Form Specification**

#### Item No.

High efficiency external infrared heating elements (18kW) with innovative deflectors attached to the outside of the well. Deep drawn V-Shaped well. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

#### **Main Features**

ITEM #
MODEL #

- Deep drawn V-Shaped well.
- External infrared heating elements with innovative deflectors applied to the well for ease of cleaning of the internal well and safe operations.
- $\bullet$  Thermostatic regulation of oil temperature up to a maximum of 185  $^{\circ}\text{C}$  .
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- IPX5 water resistance certification.
- The special design of the control knob system guarantees against water infiltration.
- External panels in Stainless Steel with Scotch Brite finish.
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.

#### Construction

- Interior of well with rounded corners for ease of cleaning.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.
- Unit delivered with four 50 mm legs in stainless steel as standard.

1 of 2 half size baskets for 18/23 lt fryers PNC 927223

PNC 206350

PNC 206303

# Included Accessories • 1 of Door for open base cupboard

<b>Optional Accessories</b>		
• OIL FILTER S/S FOR 23 LT FRYERS	PNC	200086
• Junction sealing kit	PNC	206086
<ul> <li>Kit 4 wheels - 2 swivelling with brake - it is mandatory to install base support and wheels</li> </ul>	PNC	206135
Flanged feet kit	PNC	206136
<ul> <li>Pair of side kicking strips (not for refr- freezer base)</li> </ul>	PNC	206180
Hygienic lid for 23lt fryers	PNC	206201
<ul> <li>Frontal kicking strip for 23lt fryers in two parts</li> </ul>	PNC	206203
<ul> <li>Extension nine for oil drainage for fryers</li> </ul>	PNC	206209

■
Base support for feet or wheels (lateral) for PNC 206372
23lt fryers, pastacookers and refrigerated □

Chimney upstand, 400mm

bases

• Chimney grid net, 400mm (700/900 line) PNC 206400

• SEDIMENT TRAY FOR 23LT FRYER PNC 921023

2 half baskets for 18/23lt fryers with front PNC 927200 hook

# APPROVAL:


# Modular Cooking Range Line ECO 90 One Well Electric Fryer 23 liter

• 1 full basket for 18/23lt fryers with front hook	PNC 927201 🗆
<ul> <li>2 half size baskets for 18/23 lt fryers</li> </ul>	PNC 927223 🗆
<ul> <li>1 full size basket for 18/23 lt fryers</li> </ul>	PNC 927226 🗆
<ul> <li>Unclogging rod for 23lt fryers drainage pipe</li> </ul>	PNC 927227 □
Deflector for floured products for 23lt fryers	PNC 960645 🗅




# Modular Cooking Range Line ECO 90 One Well Electric Fryer

# Front | 1 3/4 | 45 mm | 2 1/4 | 56 mm | 56 mm | 56 mm | 1 5/16 | 2 1/4 | 1 5/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1 1/16 | 1

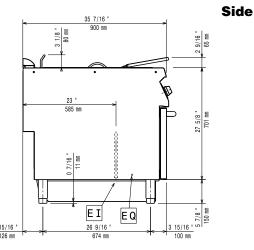

El = Electrical inlet (power) EQ = Equipotential screw

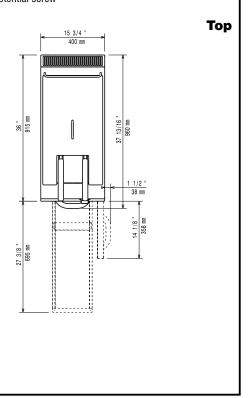

### **Electric**

Supply voltage:

**393337 (N9KKGDBAMCA)** 380-400 V/3N ph/50/60 Hz

Total Watts: 18 kW

## **Key Information:**

Usable well dimensions (width): 340 mm Usable well dimensions (height): 575 mm Usable well dimensions (depth): 400 mm

Well capacity: 21 It MIN; 23 It MAX
Thermostat Range: 105 °C MIN; 185 °C MAX

Shipping weight:70 kgShipping height:1080 mmShipping width:460 mmShipping depth:1020 mmShipping volume:0.51 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Modular Cooking Range Line ECO 90 One Well Electric Fryer 23 liter

