

09/2015

**Mod: BEL-63/B** 

**Production code: M1112** 



**Diamond**  
catering equipment

FABRICANTES DE  
MOLINOS DE CAFÉ

MANUFACTURERS  
OF COFFEE GRINDERS

Molino de café profesional  
para todo tipo de cafés

Professional coffee grinder  
for all types of coffee.

# MOVIE "63dB"

## ABS

COLLECTION SILENCER



### TECHNICAL CHARACTERISTICS 0-500gr/3' Max 4Kg

Voltage: 230V / 220V / 110V

Frequency: 50Hz / 60Hz

Phases: 1(monophase)

RPM: 1.300 / 1.600

Current: 2,1A / 4,7A

Capacitor: 14nf / 55nf

Power: 0,37Hp / 497W

Protection rating: IP21

Motor supplied with thermal protector

Maximum operating time: 30 min.

Tempered steel grinding wheel (62HRc) ø 65mm

Lifespan of grinding wheels: 500kg

Hopper capacity: 1,5kg

Doser capacity: 600g

Doser regulation: 5/12g

Doser lever: right/left

Stop/start standard version: automatic

Dimensions width x length x height: 270x460x630mm


Weight: 13kg

Air noise: 63dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel  
(62HRc) ø 65mm.

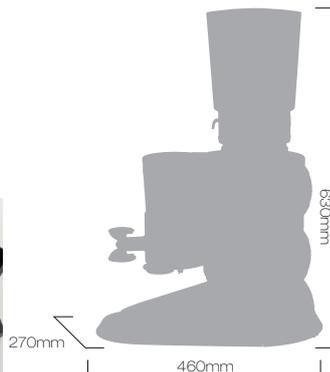

GREY

DARK GREY

BLACK

PURPLE



### MAIN ATTRIBUTES

Hopper (1.5kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. Micrometric regulation of the coffee grind using a regulatory pawl. New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). Bodywork manufactured in anti-scratch material, in a single piece (less vibrations, more robustness). With ventilation system (internal air inlet and outlet). Large tray integrated into the body, ready to take knocks (portafilter). Single-bodied, hermetically sealed doser without aroma loss, vibrationless and made of unbreakable material. Ergonomic handle. Universal coffee tamper (rotatable). Doser fitted with gasket-saver (portafilter positioner). Hardened steel grinding blades (62/65HRc) 65mm in diameter. Motor assembly with anti-vibration system. Silencer motor with internal autoventilation, 63dB.

**Optional: Left- or right-handed doser lever. Coffee counter. Optional personalisation system with chrome plates on the doser and on the rear of the bodywork. Optionally we can fit it with a "high Production" motor (0,47Hp/597W).**

